



PROCHAMPION 2500 A With high-flow watering spray line and road sign kit



PROCHAMPION 2500 A With high-flow watering spray line and road sign kit



PROCHAMPION 2500 A with telescopic mixed hitch



Rabaud
advantages

- Large sweeping widths: 2 m or 2.50 m.
- Adaptation on front 3-point linkage or on telescopic.
- Robust frame for intensive work
- 1 or 2 hydraulic motor(s) depending on the carrier oil flow (120 L/min. max.).
- Floating coupling to follow road form thanks to the swiveling system
- 30° mechanically swivelling hitch (hydraulic in option).
- +/- 420 mm mechanical offset (hydraulic in option) separate from angling
- Hydraulic engine integrated in the metal hub of the brush to save room and for more protection.
- Wide brush with polyester fibre for better lasting (inner size: Ø 178 mm / outer size: Ø 600 mm).
- 2 height-adjustable, swivelling puncture-proof wheels (Ø 250 mm).
- Pressure watering option to connect directly to your tank.

Technical characteristics

MODELS	PROCHAMPION 2000 A	PROCHAMPION 2500 A
Brush length	1980 mm	2460 mm
Brush diameter (inner / outer)	178 mm / 600 mm	
Hub	Metal	
Brush fibre type	Polyester	
Offset	420 mm right & left (only on tractor)	
Angling	+/- 30°	
Oscillation	On floating coupling	
Dimensions (L x W x H)	1,67 x 2,09 x 1,26 m	1,67 x 2,55 x 1,26 m
Weight (without option)	640 kg	660 kg
Coupling	No. 2 front 3-point hitch with removable bar	
Flow 1 hydraulic motor	30 L/min. mini. - 60 L/min. max.	
Flow 2 hydraulic motor	61 L/min. mini. - 120 L/min. max.	

Standard equipment

- Anti-projection guard.
- 3-point linkage with oscillating top link.
- 2 control tyre wheels (diameter 250 mm), swiveling and adjustable in height.
- Brush rings with extra long polyester fibre for longer lifespan.
- Mechanical angling +/- 30°.
- Mechanical offset +/- 420 mm (only on tractor).
- 2 hydraulic hoses with 2 1/2" male valve couplings.



PROCHAMPION on tractor front 3-point linkage

				Price	Reference	Price	Reference
MODELS				PROCHAMPION 2000 A		PROCHAMPION 2500 A	
PROCHAMPION for tractor with 1 hydraulic motor (for carrier with oil flow < 60 L/min.) • Without hydraulic valves - With polyester brush				7765.00	72083E	8195.00	72082E
PROCHAMPION for tractor with 2 hydraulic motor (for carrier with oil flow > 60 L/min.) • Without hydraulic valves - With polyester brush				8490.00	72085E	9205.00	72084E
OPTIONS							
Hydraulic offset				865.00	72032E	865.00	72032E
Hydraulic orientation				950.00	72086E	950.00	72086E
Electro-hydraulic control with radio-control		Sweeper with 1 hydraulic motor	2-way valve dual-acting	2820.00	72066E	2820.00	72066E
			3-way valve dual-acting	3275.00	72067E	3275.00	72067E
		Sweeper with 2 hydraulic motor	2-way valve dual-acting	3700.00	72069E	3700.00	72069E
			3-way valve dual-acting	4050.00	72070E	4050.00	72070E
Hydraulic valve	6-way valve with electric extension 5 m long			850.00	72035G	850.00	72035G
	8-way valve with electric extension 5 m long			1040.00	72036G	1040.00	72036G
180 bar pressure limiter (for sweeper with only 1 motor)				240.00	72022J	240.00	72022J
High pressure watering line with 4 sprayers (without water tank)				445.00	72064E	445.00	72064E
Scrape blade				-		3195.00	72061J
Linkage n°3 with swinging drawbar				250.00	72071E	250.00	72071E
Mixed hitch for second carrier like a telehandler				1160.00	72064F	1160.00	72064F
12 V worksite signs kit with retroreflective tape, 2 lumifog... (requires power supply)				380.00	72095C	380.00	72095C
Specific painting				185.00	72009C	185.00	72009C
EPOXY painting				430.00	72033G	430.00	72033G
SPARE BRUSH							
Polyester brush ring Ø 600 mm, value for 1 m				480.00	24F004	480.00	24F004

✓ OPTIONS




Linkage n°3 with swinging drawbar



Mixed hitch for second carrier like a telescopic



High pressure watering line, 4 sprayers

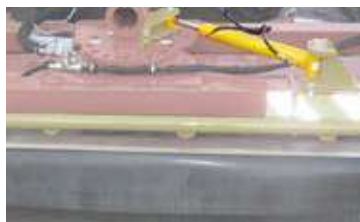

Hydraulic angling



Hydraulic offsetting



Scrape blade